

SPECIFICATION

For

FS/FDLH-0.6/1KV-CE

0.6/1(1.2)kV Copper Conductor Mica fire-barrier
XLPE Insulated Polyolefin Sheathed
Fire Resistant and Flame Retardant
with Low Smoke and Zero Halogen Power Cable
(0.6/1(1.2)kV, Cu/Mica/XLPE/FR-LSOH)

BY



(Wachara Sangsomritphon)

MANAGER, Cable Design Section

APP. _____

()

CUSTOMER

Rev.	Date	Description
0	25/06/2020	Issued specification
1	16/02/2021	Cancel code "0010"
2	25/02/2021	Add size 1 x 1.5-10 mm ²
3	31/03/2021	Change length mark
4	5/05/2021	Update the test standard version
5	11/6/2021	Update length mark on cable
6	7/11/2022	Add 5-cores
7	30/1/2024	Update Table1
8	5/4/2024	Update specification
9	25/4/2024	Update marking on cable
10	6/5/2024	Update specification
11	15/10/2024	Add Flame retardant Cat. C
12	19/11/2024	Update Table1
13	18/12/2024	Update conductor diameter

Customer Document	Rev.

Remark:

This document is based on the Customer Document for the structure and properties of electric wire and cable only. If there are different points, will be shown in deviation table.

1. Scope

This specification covers 1000V copper conductor mica fire-barrier cross-linked polyethylene (XLPE) insulated polyolefin sheathed fire resistant and flame retardant with low smoke and zero halogen power cable.

The cable shall be based on IEC 60502-1 : 2021.

The maximum conductor temperature shall be 90°C.

Fire resistant tested according to BS 6387 Category CWZ.

Remark : Resistance to fire with water (W) and with mechanical shock (Z) ; Not all sizes or types of cable with overall diameters greater than 20 mm. can be presently accommodated with in the standard and guidance on testing these cables should be sought from the manufacturer.

- Flame retardant test requirements per IEC 60332-1.
- Flame propagation test requirements per IEC 60332-3-22; Category A, IEC 60332-3-23; Category B and IEC 60332-3-24; Category C.
- Low smoke test requirements per IEC 61034.
- Halogen gases determinations test requirements per IEC 60754-1 and IEC 60754-2.
- Extremely low toxicity gases test requirements per IEC 60684-2 and Defence Standard 02-713 (Conductor size $\leq 400 \text{ mm}^2$).

2. Conductor

For size $\leq 6 \text{ mm}^2$:

The conductor shall be non-compacted concentric stranded uncoated annealed copper conductor in accordance with IEC 60228 : 2004, Class 2.

The direction of lay shall be left-hand (S) lay.

For size $\geq 10 \text{ mm}^2$:

The conductor shall be compacted concentric stranded uncoated annealed copper conductor in accordance with IEC 60228 : 2004, Class 2.

The direction of lay shall be left-hand (S) lay in the outermost layer.

3. Fire Barrier Tape

The mica tape shall be longitudinally applied over the conductor

4. Insulation

The insulation shall be cross-linked polyethylene (XLPE) compound meet the requirements of IEC 60502-1 : 2021.

The average thickness of the insulation shall be not less than that given in Table 1.

The minimum thickness shall not fall below 90% of the nominal value in Table 1 by more than 0.1 mm.

5. Cabling (For multi-cores only)

The individual insulated cores shall be cabled together with suitable non-hygroscopic filler to give the completed cable a substantially circular cross section.

The direction of lay shall be left-hand (S) lay.

A suitable binder tape shall be applied helically over the cabled core.

6. Core Identification

The cores shall be identified by color, as follows :

Single-core : white

2-cores : blue, brown

3-cores : brown, black, grey

4-cores : blue, brown, black, grey

(White color is natural color of XLPE insulation)

7. Sheath

The sheath shall be sunlight resistant, low smoke and zero halogen and flame retardant polyolefin (ST8) compound meet the requirements of IEC 60502-1 : 2021.

The average thickness of the sheath shall be not less than that given in Table 1.

The minimum thickness shall not fall below 80% of the nominal value in Table 1 by more than 0.2 mm.

The color of the sheath shall be orange or black.

8. Marking on Cable

The marking items shall be marked by printed at intervals not exceeding 1 meter with suitable means throughout the length of cable.

1. Manufacturer's name and/or trade mark "  YAZAKI..... : TYE"

2. Year of manufacture

3. Cable property cable "FS/FDLH"

4. Rated circuit voltage "0.6/1KV"

5. Type of conductor "CU"

6. Type of insulation and sheath "XLPE/LSOH"

7. Type of cable "POWER CABLE"

8. Number of cores and size of conductor

9. The continuous reel length marking (in figure) shall be made on the sheath at every 1 meter

Remark : Length mark on single-core is for size $\geq 16 \text{ mm}^2$

9. Test and Properties

The cable shall meet the requirements in Test and Inspection and Table 1, when tested in accordance with IEC 60502-1 : 2021, IEC 60228 : 2004, BS 6387 Category CWZ., IEC 60332-1, IEC 60332-3-22; Category A, IEC 60332-3-23; Category B, IEC 60332-3-24; Category C, IEC 61034, IEC 60754-1, IEC 60754-2, IEC 60684-2 and Defence Standard 02-713.

Remark: Sunlight resistant test meet the requirement of TIS 293-2541.


Except black color sheath ; For longer life of cable should be avoid exposure to direct solar radiation it necessary, cover is required.

10. Packing

The cable shall be placed on non-returnable wooden reels.

The reels shall be covered with suitable covering to provide the cable with physical protection during transportation and during ordinary storage and handling operations.

Each reel shall be clearly marked as follows.

1. Designation "FS/FDLH-0.6/1KV-CE"
2. Number of cores and size of conductor
3. Cable length
4. Net and gross weight
5. Manufacturer's name and/or trade mark "  **YAZAKI** "
6. Rolling direction of reel

Test and Inspection

Routine Tests

- Maximum conductor resistance, Ohm/km..... specified in Table 1
- AC test voltage for 5 minutes, kV 3.5

Sample Tests

- Construction specified in Table 1
- Hot set test at $200\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$ for XLPE
 - Maximum elongation under load (%) 175
 - Maximum permanent elongation after cooling (%).....15

Type Tests

- Fire resistant tested according to BS 6387 Category CWZ.
- Flame retardant tested according to IEC 60332-1.
- Flame propagation test according to IEC 60332-3-22; Category A or IEC 60332-3-23; Category B or IEC 60332-3-24; Category C.
- Smoke emission tested according to IEC 61034.
- Halogen gases tested according to IEC 60754-1 and IEC 60754-2.
- Extremely low toxicity gases test according to IEC 60684-2 and Defence Standard 02-713.

Definition concerning the tests


Routine Tests: Tests made by the manufacturer on each manufactured length of cable to check that each length meets the specified requirements.

Sample tests: Tests made by the manufacturer on samples of completed cable or components taken from a completed cable, at a specified frequency, so as to verify that the finished product meets the specified requirements.

Type tests: Tests made before supplying, on a general commercial basis, a type of cable covered by this standard, in order to demonstrate satisfactory performance characteristics to meet the intended application.

Cable structure

Cross-sectional (Not scale)

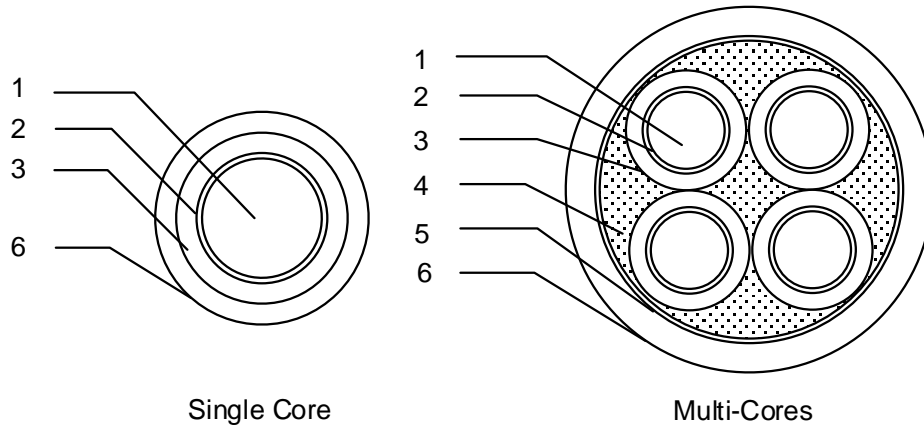

No.	Structure	Material
1	Conductor	Stranded annealed copper
2	Fire Barrier	Mica tape
3	Insulation	Cross-linked polyethylene (XLPE) compound
4	Filler	Non-hygroscopic
5	Binder tape	PS tape or suitable tape
6	Sheath	Low smoke and zero halogen flame retardant polyolefin (ST8) compound

Application: For installation into open tray, conduit, underground duct trench or direct burial in ground which provide flame retardant, low smoke and maintain circuit integrity in case of fire. Maximum conductor temperature of 90 °C for normal operation and 250 °C for short circuit conditions.

Table 1

No. of core	Size (mm ²)	Conductor (wires/type)	Conductor diameter approx. (mm)	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter approx. (mm)	Conductor resistance at 20°C maximum (Ohm/km)	Weight of cable approx. (kg/km)	Standard packing length (m)
1	1.5	7/Non-compacted	1.59	0.7	1.4	7.0	12.1	60	500
1	2.5	7/Non-compacted	2.01	0.7	1.4	7.5	7.41	74	500
1	4	7/Non-compacted	2.55	0.7	1.4	8.0	4.61	93	500
1	6	7/Non-compacted	3.12	0.7	1.4	9.0	3.08	118	500
1	10	7/Compacted	3.70	0.7	1.4	9.5	1.83	158	500
1	16	7/Compacted	4.70	0.7	1.4	10.5	1.15	221	500
1	25	7/Compacted	5.90	0.9	1.4	12.0	0.727	324	500
1	35	7/Compacted	6.90	0.9	1.4	13.0	0.524	421	500
1	50	19/Compacted	8.20	1.0	1.4	14.5	0.387	552	500
1	70	19/Compacted	9.80	1.1	1.4	16.5	0.268	762	500
1	95	19/Compacted	11.60	1.1	1.5	18.5	0.193	1029	500
1	120	37/Compacted	13.10	1.2	1.6	20.5	0.153	1301	500
1	150	37/Compacted	14.50	1.4	1.6	22.5	0.124	1587	500
1	185	37/Compacted	16.10	1.6	1.7	25.0	0.0991	1943	500
1	240	61/Compacted	18.60	1.7	1.8	28.0	0.0754	2528	500
1	300	61/Compacted	20.80	1.8	1.9	30.5	0.0601	3144	500
1	400	61/Compacted	23.40	2.0	2.0	34.0	0.0470	4011	500
1	500	61/Compacted	26.60	2.2	2.1	38.0	0.0366	5107	500
1	630	61/Compacted	30.20	2.4	2.3	42.5	0.0283	6533	500
1	800	61/Compacted	34.00	2.6	2.4	47.0	0.0221	8158	500
1	1000	127/Compacted	39.40	2.8	2.6	53.0	0.0176	10652	300

Table 1 (continued)

No. of cores	Size (mm ²)	Conductor (wires/type)	Conductor diameter approx. (mm)	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter approx. (mm)	Conductor resistance at 20°C maximum (Ohm/km)	Weight of cable approx. (kg/km)	Standard packing length (m)
2	1.5	7/Non-compacted	1.59	0.7	1.8	12.5	12.1	148	500
2	2.5	7/Non-compacted	2.01	0.7	1.8	13.0	7.41	181	500
2	4	7/Non-compacted	2.55	0.7	1.8	14.5	4.61	226	500
2	6	7/Non-compacted	3.12	0.7	1.8	15.5	3.08	281	500
2	10	7/Compacted	3.70	0.7	1.8	16.5	1.83	375	500
2	16	7/Compacted	4.70	0.7	1.8	19.0	1.15	504	500
2	25	7/Compacted	5.90	0.9	1.8	22.0	0.727	734	500
2	35	7/Compacted	6.90	0.9	1.8	24.0	0.524	951	500
2	50	19/Compacted	8.20	1.0	1.8	27.5	0.387	1246	500
2	70	19/Compacted	9.80	1.1	1.9	31.5	0.268	1723	500
2	95	19/Compacted	11.60	1.1	2.0	35.0	0.193	2305	500
2	120	37/Compacted	13.10	1.2	2.2	39.5	0.153	2933	500
2	150	37/Compacted	14.50	1.4	2.3	43.5	0.124	3584	500
2	185	37/Compacted	16.10	1.6	2.4	48.0	0.0991	4439	500
2	240	61/Compacted	18.60	1.7	2.6	54.0	0.0754	5751	500
2	300	61/Compacted	20.80	1.8	2.8	59.5	0.0601	7132	500
2	400	61/Compacted	23.40	2.0	3.0	66.0	0.0470	9026	300

Table 1 (continued)

No. of cores	Size (mm ²)	Conductor (wires/type)	Conductor diameter approx. (mm)	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter approx. (mm)	Conductor resistance at 20°C maximum (Ohm/km)	Weight of cable approx. (kg/km)	Standard packing length (m)
3	1.5	7/Non-compacted	1.59	0.7	1.8	13.0	12.1	173	500
3	2.5	7/Non-compacted	2.01	0.7	1.8	14.0	7.41	219	500
3	4	7/Non-compacted	2.55	0.7	1.8	15.0	4.61	279	500
3	6	7/Non-compacted	3.12	0.7	1.8	16.5	3.08	357	500
3	10	7/Compacted	3.70	0.7	1.8	17.5	1.83	484	500
3	16	7/Compacted	4.70	0.7	1.8	20.0	1.15	664	500
3	25	7/Compacted	5.90	0.9	1.8	23.5	0.727	982	500
3	35	7/Compacted	6.90	0.9	1.8	26.0	0.524	1283	500
3	50	19/Compacted	8.20	1.0	1.8	29.0	0.387	1685	500
3	70	19/Compacted	9.80	1.1	2.0	33.5	0.268	2367	500
3	95	19/Compacted	11.60	1.1	2.1	38.0	0.193	3178	500
3	120	37/Compacted	13.10	1.2	2.2	42.0	0.153	4024	500
3	150	37/Compacted	14.50	1.4	2.4	46.5	0.124	4955	500
3	185	37/Compacted	16.10	1.6	2.6	51.5	0.0991	6151	500
3	240	61/Compacted	18.60	1.7	2.8	58.0	0.0754	8010	500
3	300	61/Compacted	20.80	1.8	2.9	63.5	0.0601	9922	300
3	400	61/Compacted	23.40	2.0	3.2	71.0	0.0470	12599	300

Table 1 (continued)

No. of cores	Size (mm ²)	Conductor (wires/type)	Conductor diameter approx. (mm)	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter approx. (mm)	Conductor resistance at 20°C maximum (Ohm/km)	Weight of cable approx. (kg/km)	Standard packing length (m)
4	1.5	7/Non-compacted	1.59	0.7	1.8	14.0	12.1	210	500
4	2.5	7/Non-compacted	2.01	0.7	1.8	15.0	7.41	266	500
4	4	7/Non-compacted	2.55	0.7	1.8	16.5	4.61	345	500
4	6	7/Non-compacted	3.12	0.7	1.8	18.0	3.08	446	500
4	10	7/Compacted	3.70	0.7	1.8	19.0	1.83	610	500
4	16	7/Compacted	4.70	0.7	1.8	22.0	1.15	842	500
4	25	7/Compacted	5.90	0.9	1.8	26.0	0.727	1253	500
4	35	7/Compacted	6.90	0.9	1.8	28.5	0.524	1655	500
4	50	19/Compacted	8.20	1.0	1.9	32.0	0.387	2197	500
4	70	19/Compacted	9.80	1.1	2.1	37.5	0.268	3078	500
4	95	19/Compacted	11.60	1.1	2.2	42.0	0.193	4157	500
4	120	37/Compacted	13.10	1.2	2.4	46.5	0.153	5282	500
4	150	37/Compacted	14.50	1.4	2.6	52.0	0.124	6491	500
4	185	37/Compacted	16.10	1.6	2.7	57.5	0.0991	8044	500
4	240	61/Compacted	18.60	1.7	3.0	64.5	0.0754	10504	300
4	300	61/Compacted	20.80	1.8	3.2	71.0	0.0601	13043	300
4	400	61/Compacted	23.40	2.0	3.4	79.0	0.0470	16523	200